

# Mining Frequent Itemsets

15 September 2020 06:58 AM


1. Mining Frequent Itemsets with Candidate Generation - Apriori Algorithm
2. Mining Frequent Itemsets without Candidate Generation - Frequent Pattern Growth (FP-Growth)

<i>TID</i>	<i>List of item_IDs</i>
T100	I1, I2, I5
T200	I2, I4
T300	I2, I3
T400	I1, I2, I4
T500	I1, I3
T600	I2, I3
T700	I1, I3
T800	I1, I2, I3, I5
T900	I1, I2, I3

Itemset	Sup. count
{I1}	6
{I2}	7
{I3}	6
{I4}	2
{I5}	2

Arrange sorting order:

I2	7	--
I1	6	--
I3	6	--
I4	2	--
I5	2	--

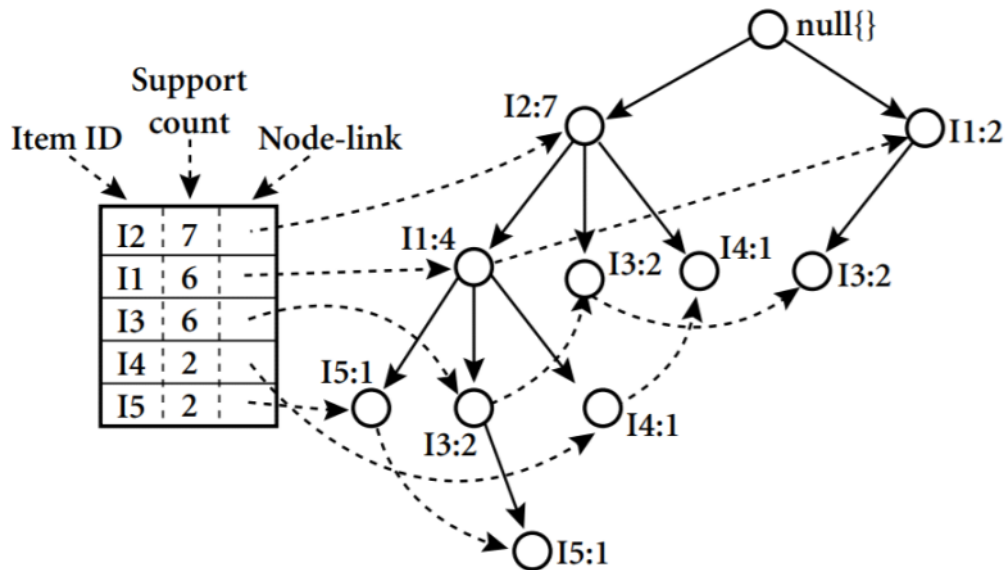

Mining the FP-tree by creating conditional (sub-)pattern bases.

Item	Conditional Pattern Base	Conditional FP-tree	Frequent Patterns Generated
I5	$\{\{I2, I1: 1\}, \{I2, I1, I3: 1\}\}$	$\langle I2: 2, I1: 2 \rangle$	$\{I2, I5: 2\}, \{I1, I5: 2\}, \{I2, I1, I5: 2\}$
I4	$\{\{I2, I1: 1\}, \{I2: 1\}\}$	$\langle I2: 2 \rangle$	$\{I2, I4: 2\}$
I3	$\{\{I2, I1: 2\}, \{I2: 2\}, \{I1: 2\}\}$	$\langle I2: 4, I1: 2 \rangle, \langle I1: 2 \rangle$	$\{I2, I3: 4\}, \{I1, I3: 4\}, \{I2, I1, I3: 2\}$
I1	$\{\{I2: 4\}\}$	$\langle I2: 4 \rangle$	$\{I2, I1: 4\}$

**Exercise :**

**1. Solve the following Problem**

A database has five transactions. Let  $min\_sup = 60\%$  and  $min\_conf = 80\%$ .

TID	items_bought
T100	{M, O, N, K, E, Y}
T200	{D, O, N, K, E, Y}
T300	{M, A, K, E}
T400	{M, U, C, K, Y}
T500	{C, O, O, K, I, E}